

SOKEI FIRE

sokeifire.com

DRY RISER INLET & OUTLET CABINET · UK STANDARD SIZES · DRAWING PACK

REV. 01 · 2026-09-10

SHEET	DRAWING No.	NOMINAL SIZE (W x H x D)	WIDTH mm	HEIGHT mm	DEPTH mm	MOUNTING	APPLICATION
2	SK-UK-I2V-REC	395W x 595H x 295D	395	595	295	RECESSED	2-way inlet breeching for a 100 mm (4 in) dry riser
3	SK-UK-I2H-REC	595W x 395H x 295D	595	395	295	RECESSED	2-way inlet breeching for a 100 mm (4 in) dry riser
4	SK-UK-I2V-SUR	395W x 595H x 295D	395	595	295	SURFACE	2-way inlet breeching for a 100 mm (4 in) dry riser
5	SK-UK-I4-REC	595W x 595H x 295D	595	595	295	RECESSED	4-way inlet breeching for a 150 mm (6 in) dry riser
6	SK-UK-O1-REC	460W x 630H x 275D	460	630	275	RECESSED	One 65 mm landing valve on a dry or wet riser drop
7	SK-UK-FLR-STD	395W x 595H x 295D	395	595	295	FLOOR MOUNTED	2-way inlet breeching where there is no wall to recess into
8	SK-UK-ARCH-O	460W x 630H x 80D	460	630	80	ARCHITRAVE	Door and 38 mm surrounding frame only - no box; fits over an existing recess

HOW THESE SIZES WERE ESTABLISHED

UK dry riser cabinets are built to the BS 5041 Part 5 box dimensions so a standard inlet breeching drops straight in.

- 395 x 595 x 295 - 2-way inlet, VERTICAL | 595 x 395 x 295 - the same cabinet HORIZONTAL

Both orientations are standard in the UK. State which one you want on the order.


- 595 x 595 x 295 - 4-way inlet for a 150 mm (6 in) riser
- 460 x 630 x 275 - outlet cabinet for a 65 mm landing valve
- 395 x 595 x 295 on a plinth - floor mounted, 16 SWG Zintec with a 5 mm chequer plate door

Wall aperture is 10 mm larger all round than the cabinet body. Red is RAL 3002 carmine - the UK fire main colour, not RAL 3000.


Doors carry a 6 mm Georgian wired glass panel with a slam lock keyed alike and concealed pivot hinges; a stainless piano hinge is supplied on request.

ALL DRAWINGS ALSO SUPPLIED AS DXF (AutoCAD R2013, 1:1 in mm) - SEE ACCOMPANYING FILES.

FRONT ELEVATION

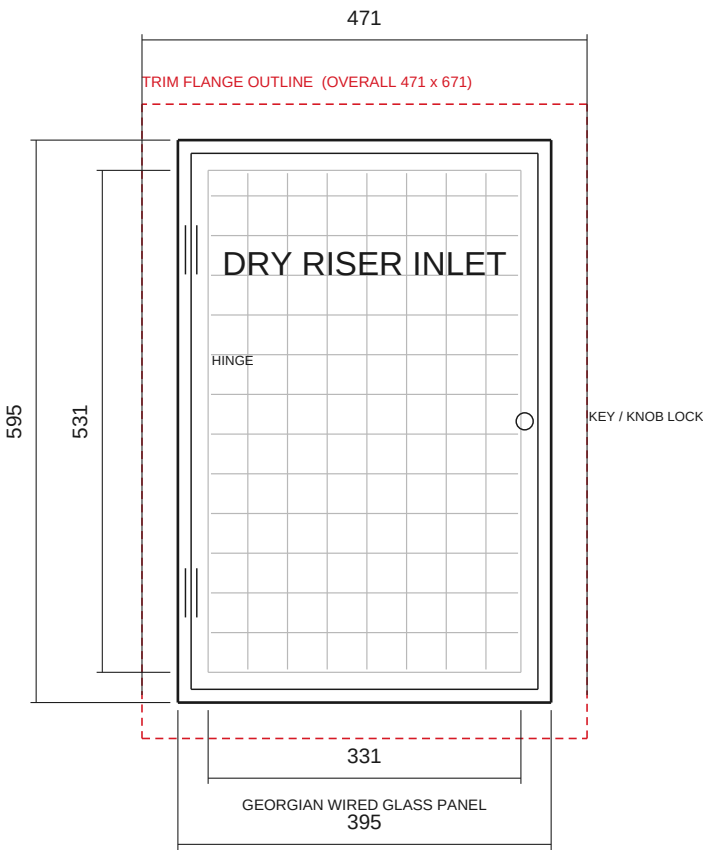

SIDE SECTION

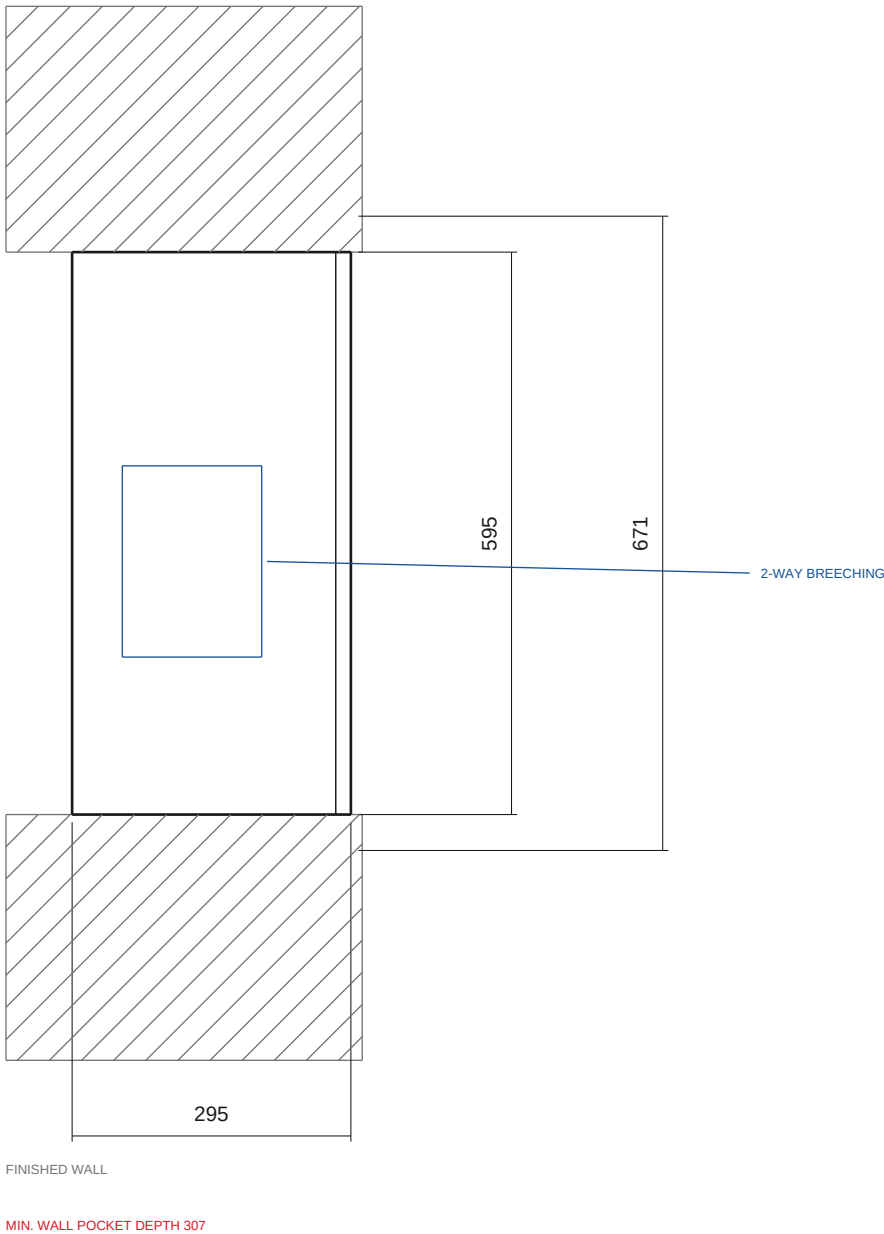

APPLICATION · SK-UK-I2V

NOMINAL TRADE SIZE

395W x 595H x 295D

METRIC (W x H x D)

395 x 595 x 295 mm

MOUNTING

RECESSED, wall aperture 405 x 605 x 305

CONTENTS

2-way inlet breeching for a 100 mm (4 in) dry riser

BODY

Zintec or CRS 1.2-1.5 mm, powder coat RAL 3002

DOOR

6 mm Georgian wired glass panel in a steel door

HARDWARE

Slam lock keyed alike, concealed pivot hinges (piano hinge on request)

MOUNTING HEIGHT

Inlet 400-600 mm AFF typical; outlet to the landing valve on the riser drawing

CODE BASIS

Box dimensions to BS 5041 Part 5; installation to BS 9990

REMARK

The vertical inlet cabinet - fits between studs or in a pier.

NOTES

- ALL DIMENSIONS IN MILLIMETRES, WRITTEN W x H x D. WALL APERTURE IS 10 mm LARGER ALL ROUND THAN THE CABINET BODY.
- BODY: ZINTEC OR COLD-ROLLED STEEL 1.2-1.5 mm (16 SWG ON FLOOR-MOUNTED). SUS 304 BRUSHED STAINLESS ALSO MADE.
- FINISH: POWDER COAT RAL 3002 CARMINE RED - THE UK CONVENTION FOR FIRE MAINS. RAL 3000, WHITE OR BARE BRUSHED STAINLESS ON REQUEST.
- GLAZING: 6 mm GEORGIAN WIRED GLASS PANEL. CLEAR TOUGHENED GLASS, POLYCARBONATE OR A SOLID STEEL DOOR ALSO MADE.
- HARDWARE: SLAM LOCK KEYED ALIKE, CONCEALED PIVOT HINGES AS STANDARD. STAINLESS PIANO HINGE OR A PADLOCK HASP FOR A FIRE-BRIGADE PADLOCK ON REQUEST.
- LETTERING: "DRY RISER INLET" OR "DRY RISER OUTLET", WHITE ON RED. "WET RISER", "FIRE MAIN" OR "PRV" ON REQUEST.
- TOLERANCE ON OVERALL DIMENSIONS: +/- 2 mm. EXTERNAL INLET CABINETS HAVE A GASKETED DOOR AND DRIP LIP.
- CABINETS ARE MADE TO THE BS 5041 PART 5 BOX DIMENSIONS SO A STANDARD BREECHING DROPS STRAIGHT IN. INLET BREECHINGS AND LANDING VALVES ARE THIRD-PARTY BOUGHT-IN COMPONENTS. WE DO NOT HOLD LPCB OR KITEMARK CERTIFICATION AND DO NOT CLAIM IT.

SOKEI FIRE

Fire hose cabinet manufacturer · sokeifire.com

UK MARKET

STANDARD SIZE DRAWING PACK

TITLE

DRY RISER INLET CABINET - 395 x 595 x 295 (2-WAY, VERTICAL, RECESSED)

NOMINAL TRADE SIZE

395W x 595H x 295D

DRAWING No.

SK-UK-I2V-REC

MOUNTING

RECESSED

UNITS



mm [inch]

SCALE

1 : 8

FRONT ELEVATION

SIDE SECTION

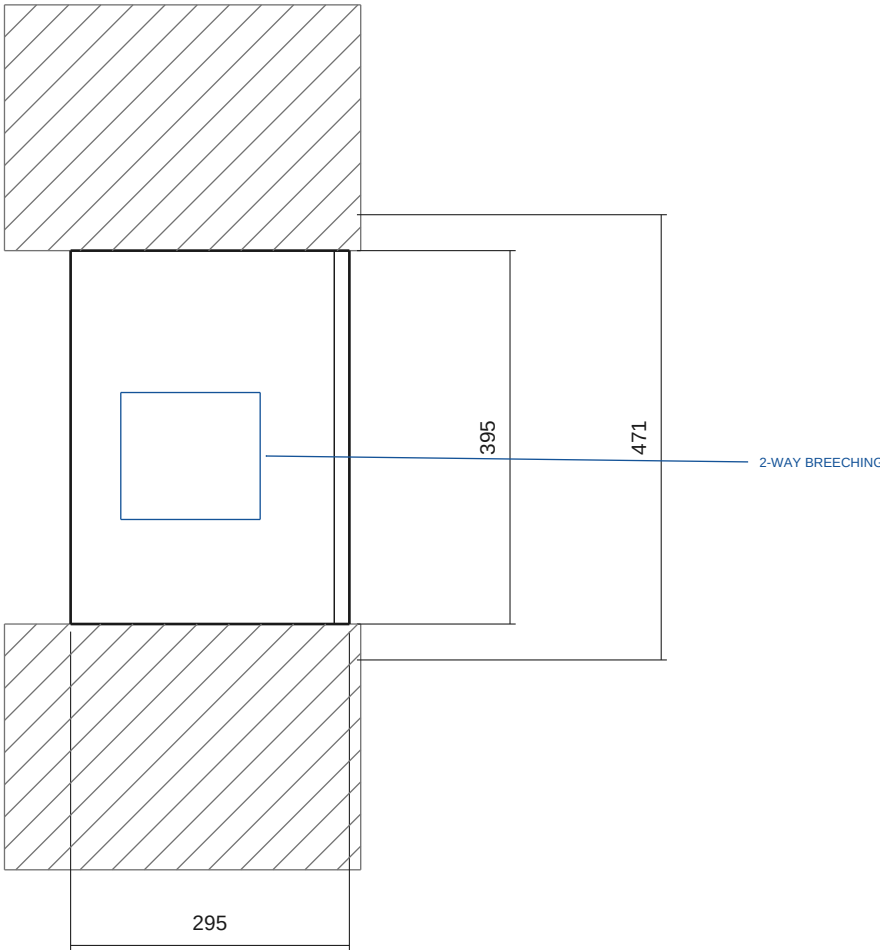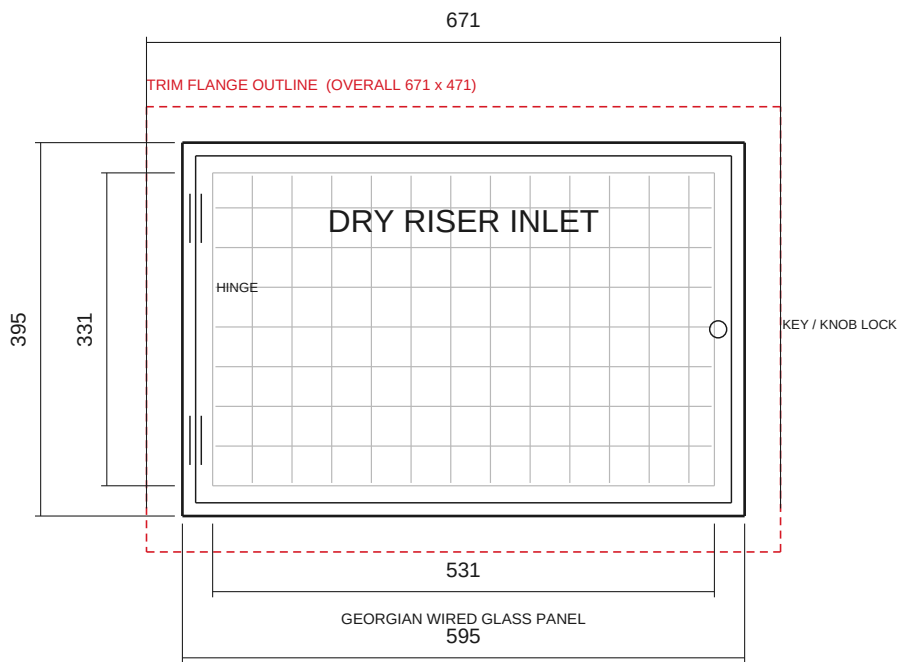

APPLICATION · SK-UK-I2H

NOMINAL TRADE SIZE

595W x 395H x 295D

METRIC (W x H x D)

595 x 395 x 295 mm

MOUNTING

RECESSED, wall aperture 605 x 405 x 305

CONTENTS

2-way inlet breeching for a 100 mm (4 in) dry riser

BODY

Zintec or CRS 1.2-1.5 mm, powder coat RAL 3002

DOOR

6 mm Georgian wired glass panel in a steel door

HARDWARE

Slam lock keyed alike, concealed pivot hinges (piano hinge on request)

MOUNTING HEIGHT

Inlet 400-600 mm AFF typical; outlet to the landing valve on the riser drawing

CODE BASIS

Box dimensions to BS 5041 Part 5; installation to BS 9990

REMARK

Same cabinet turned horizontal. Both orientations are standard in the UK - state which on the order.

NOTES

- ALL DIMENSIONS IN MILLIMETRES, WRITTEN W x H x D. WALL APERTURE IS 10 mm LARGER ALL ROUND THAN THE CABINET BODY.
- BODY: ZINTEC OR COLD-ROLLED STEEL 1.2-1.5 mm (16 SWG ON FLOOR-MOUNTED). SUS 304 BRUSHED STAINLESS ALSO MADE.
- FINISH: POWDER COAT RAL 3002 CARMINIE RED - THE UK CONVENTION FOR FIRE MAINS. RAL 3000, WHITE OR BARE BRUSHED STAINLESS ON REQUEST.
- GLAZING: 6 mm GEORGIAN WIRED GLASS PANEL. CLEAR TOUGHENED GLASS, POLYCARBONATE OR A SOLID STEEL DOOR ALSO MADE.
- HARDWARE: SLAM LOCK KEYED ALIKE, CONCEALED PIVOT HINGES AS STANDARD. STAINLESS PIANO HINGE OR A PADLOCK HASP FOR A FIRE-BRIGADE PADLOCK ON REQUEST.
- LETTERING: "DRY RISER INLET" OR "DRY RISER OUTLET", WHITE ON RED. "WET RISER", "FIRE MAIN" OR "PRV" ON REQUEST.
- TOLERANCE ON OVERALL DIMENSIONS: +/- 2 mm. EXTERNAL INLET CABINETS HAVE A GASKETED DOOR AND DRIP LIP.
- CABINETS ARE MADE TO THE BS 5041 PART 5 BOX DIMENSIONS SO A STANDARD BREECHING DROPS STRAIGHT IN. INLET BREECHINGS AND LANDING VALVES ARE THIRD-PARTY BOUGHT-IN COMPONENTS. WE DO NOT HOLD LPCB OR KITEMARK CERTIFICATION AND DO NOT CLAIM IT.

SOKEI FIRE

Fire hose cabinet manufacturer · sokeifire.com

UK MARKET

STANDARD SIZE DRAWING PACK

TITLE

DRY RISER INLET CABINET - 595 x 395 x 295 (2-WAY, HORIZONTAL, RECESSED)

NOMINAL TRADE SIZE

595W x 395H x 295D

DRAWING No.

SK-UK-I2H-REC

MOUNTING

RECESSED

UNITS


mm [inch]

SCALE

1 : 8

FRONT ELEVATION

SIDE SECTION

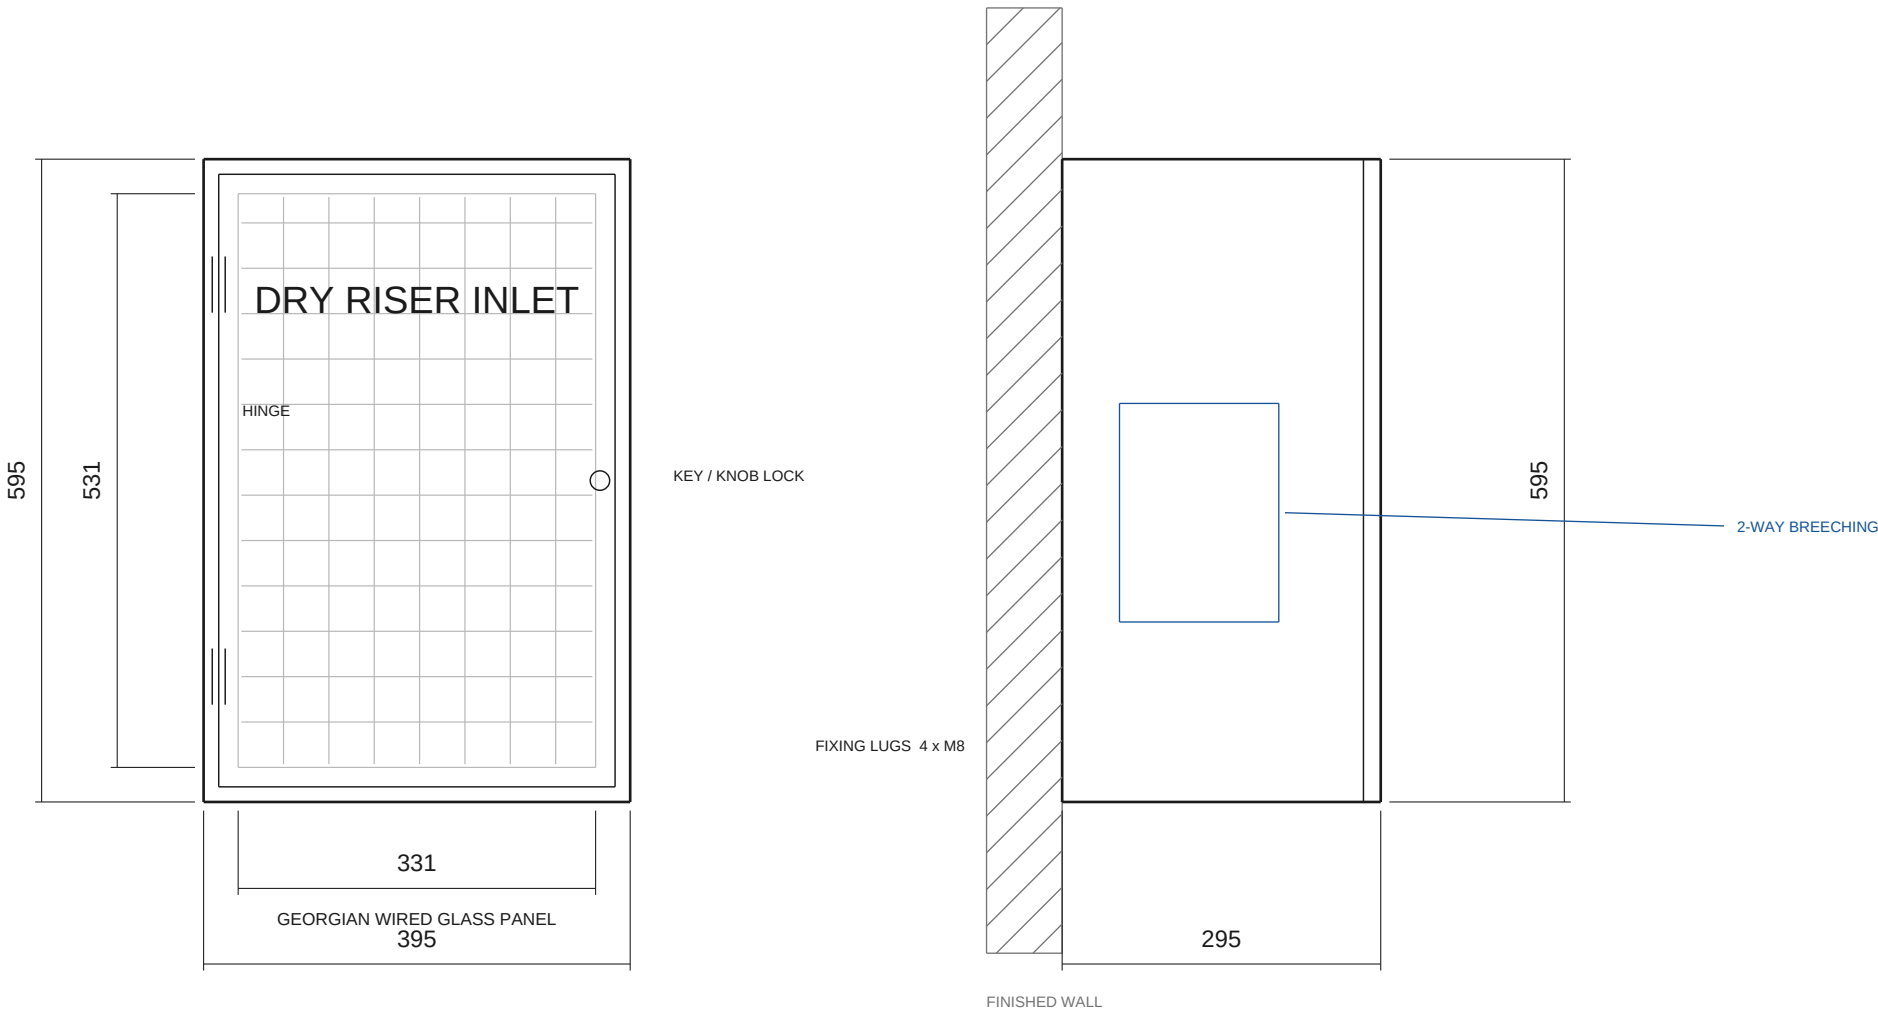

APPLICATION · SK-UK-I2V-S

NOMINAL TRADE SIZE

395W x 595H x 295D

METRIC (W x H x D)

395 x 595 x 295 mm

MOUNTING

SURFACE, WALL MOUNTED

CONTENTS

2-way inlet breeching for a 100 mm (4 in) dry riser

BODY

Zintec or CRS 1.2-1.5 mm, powder coat RAL 3002

DOOR

6 mm Georgian wired glass panel in a steel door

HARDWARE

Slam lock keyed alike, concealed pivot hinges (piano hinge on request)

MOUNTING HEIGHT

Inlet 400-600 mm AFF typical; outlet to the landing valve on the riser drawing

CODE BASIS

Box dimensions to BS 5041 Part 5; installation to BS 9990

REMARK

Surface type where the wall cannot be cut. Gasketed door and drip lip for external positions.

NOTES

- ALL DIMENSIONS IN MILLIMETRES, WRITTEN W x H x D. WALL APERTURE IS 10 mm LARGER ALL ROUND THAN THE CABINET BODY.
- BODY: ZINTEC OR COLD-ROLLED STEEL 1.2-1.5 mm (16 SWG ON FLOOR-MOUNTED). SUS 304 BRUSHED STAINLESS ALSO MADE.
- FINISH: POWDER COAT RAL 3002 CARMINE RED - THE UK CONVENTION FOR FIRE MAINS. RAL 3000, WHITE OR BARE BRUSHED STAINLESS ON REQUEST.
- GLAZING: 6 mm GEORGIAN WIRED GLASS PANEL. CLEAR TOUGHENED GLASS, POLYCARBONATE OR A SOLID STEEL DOOR ALSO MADE.
- HARDWARE: SLAM LOCK KEYED ALIKE, CONCEALED PIVOT HINGES AS STANDARD. STAINLESS PIANO HINGE OR A PADLOCK HASP FOR A FIRE-BRIGADE PADLOCK ON REQUEST.
- LETTERING: "DRY RISER INLET" OR "DRY RISER OUTLET", WHITE ON RED. "WET RISER", "FIRE MAIN" OR "PRV" ON REQUEST.
- TOLERANCE ON OVERALL DIMENSIONS: +/- 2 mm. EXTERNAL INLET CABINETS HAVE A GASKETED DOOR AND DRIP LIP.
- CABINETS ARE MADE TO THE BS 5041 PART 5 BOX DIMENSIONS SO A STANDARD BREECHING DROPS STRAIGHT IN. INLET BREECHINGS AND LANDING VALVES ARE THIRD-PARTY BOUGHT-IN COMPONENTS. WE DO NOT HOLD LPCB OR KITEMARK CERTIFICATION AND DO NOT CLAIM IT.

SOKEI FIRE

Fire hose cabinet manufacturer · sokeifire.com

UK MARKET

STANDARD SIZE DRAWING PACK

TITLE
DRY RISER INLET CABINET - 395 x 595 x 295 (2-WAY, VERTICAL, SURFACE)

NOMINAL TRADE SIZE
395W x 595H x 295D

DRAWING No.
SK-UK-I2V-SUR



MOUNTING
SURFACE

UNITS
mm [inch]

SCALE
1 : 7

FRONT ELEVATION

SIDE SECTION

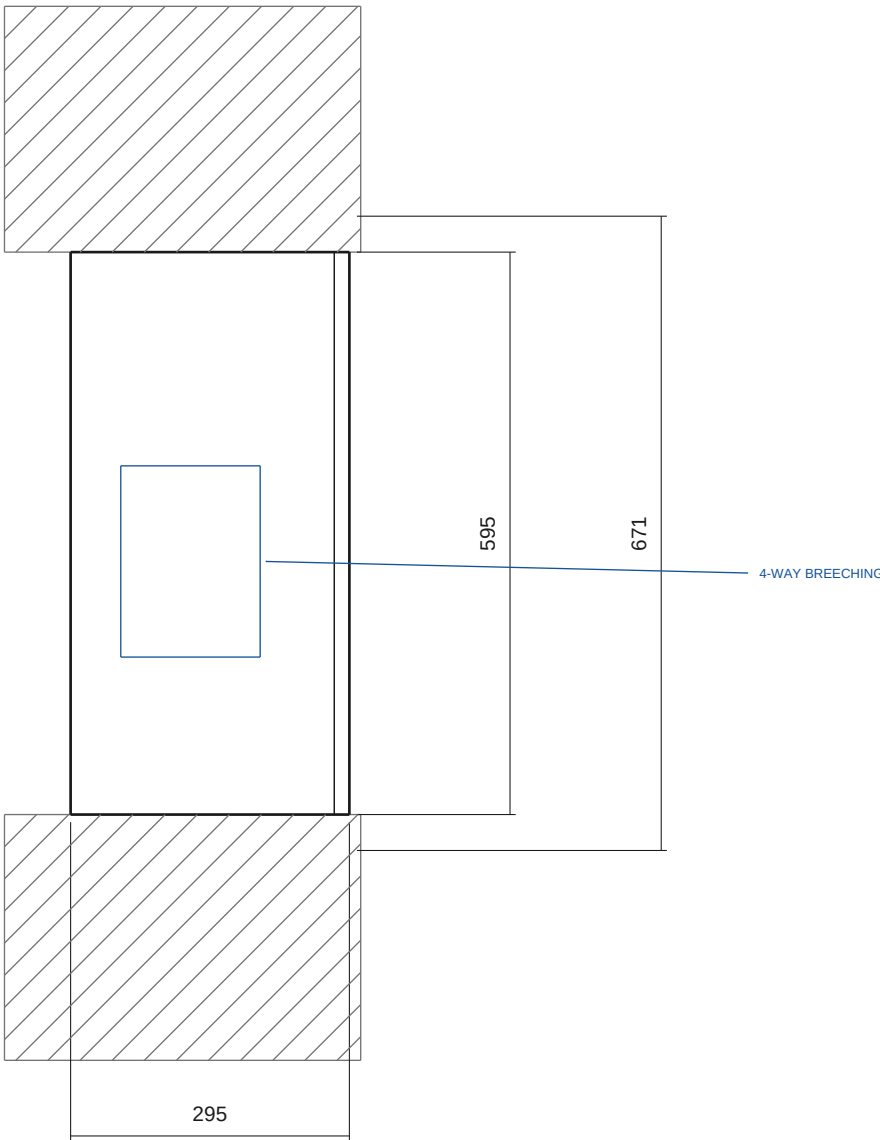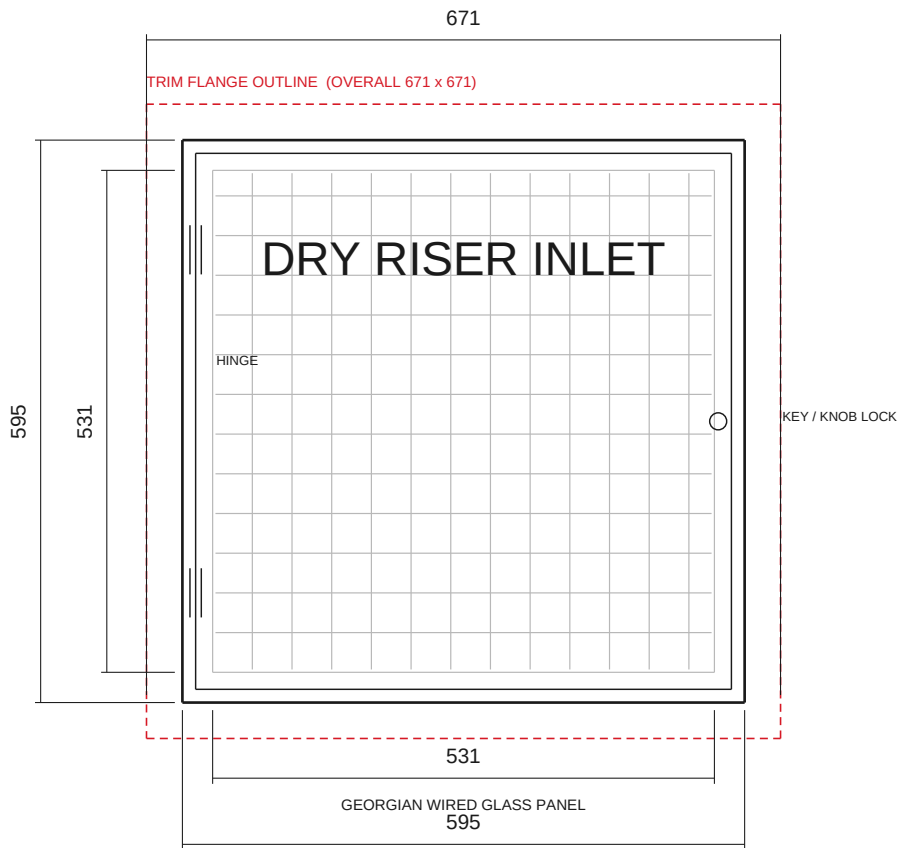

FINISHED WALL

MIN. WALL POCKET DEPTH 307

APPLICATION · SK-UK-I4

NOMINAL TRADE SIZE

595W x 595H x 295D

METRIC (W x H x D)

595 x 595 x 295 mm

MOUNTING

RECESSED, wall aperture 605 x 605 x 305

CONTENTS

4-way inlet breeching for a 150 mm (6 in) dry riser

BODY

Zintec or CRS 1.2-1.5 mm, powder coat RAL 3002

DOOR

6 mm Georgian wired glass panel in a steel door

HARDWARE

Slam lock keyed alike, concealed pivot hinges (piano hinge on request)

MOUNTING HEIGHT

Inlet 400-600 mm AFF typical; outlet to the landing valve on the riser drawing

CODE BASIS

Box dimensions to BS 5041 Part 5; installation to BS 9990

REMARK

Square box for the 4-way breeching. Aperture 605 x 605 x 305.

NOTES

- ALL DIMENSIONS IN MILLIMETRES, WRITTEN W x H x D. WALL APERTURE IS 10 mm LARGER ALL ROUND THAN THE CABINET BODY.
- BODY: ZINTEC OR COLD-ROLLED STEEL 1.2-1.5 mm (16 SWG ON FLOOR-MOUNTED). SUS 304 BRUSHED STAINLESS ALSO MADE.
- FINISH: POWDER COAT RAL 3002 CARMINIE RED - THE UK CONVENTION FOR FIRE MAINS. RAL 3000, WHITE OR BARE BRUSHED STAINLESS ON REQUEST.
- GLAZING: 6 mm GEORGIAN WIRED GLASS PANEL. CLEAR TOUGHENED GLASS, POLYCARBONATE OR A SOLID STEEL DOOR ALSO MADE.
- HARDWARE: SLAM LOCK KEYED ALIKE, CONCEALED PIVOT HINGES AS STANDARD. STAINLESS PIANO HINGE OR A PADLOCK HASP FOR A FIRE-BRIGADE PADLOCK ON REQUEST.
- LETTERING: "DRY RISER INLET" OR "DRY RISER OUTLET", WHITE ON RED. "WET RISER", "FIRE MAIN" OR "PRV" ON REQUEST.
- TOLERANCE ON OVERALL DIMENSIONS: +/- 2 mm. EXTERNAL INLET CABINETS HAVE A GASKETED DOOR AND DRIP LIP.
- CABINETS ARE MADE TO THE BS 5041 PART 5 BOX DIMENSIONS SO A STANDARD BREECHING DROPS STRAIGHT IN. INLET BREECHINGS AND LANDING VALVES ARE THIRD-PARTY BOUGHT-IN COMPONENTS. WE DO NOT HOLD LPCB OR KITEMARK CERTIFICATION AND DO NOT CLAIM IT.

SOKEI FIRE

Fire hose cabinet manufacturer · sokeifire.com

UK MARKET

STANDARD SIZE DRAWING PACK

TITLE

DRY RISER INLET CABINET - 595 x 595 x 295 (4-WAY, RECESSED)

NOMINAL TRADE SIZE

595W x 595H x 295D

DRAWING No.

SK-UK-I4-REC

MOUNTING

RECESSED


UNITS

mm [inch]


SCALE

1 : 8

FRONT ELEVATION

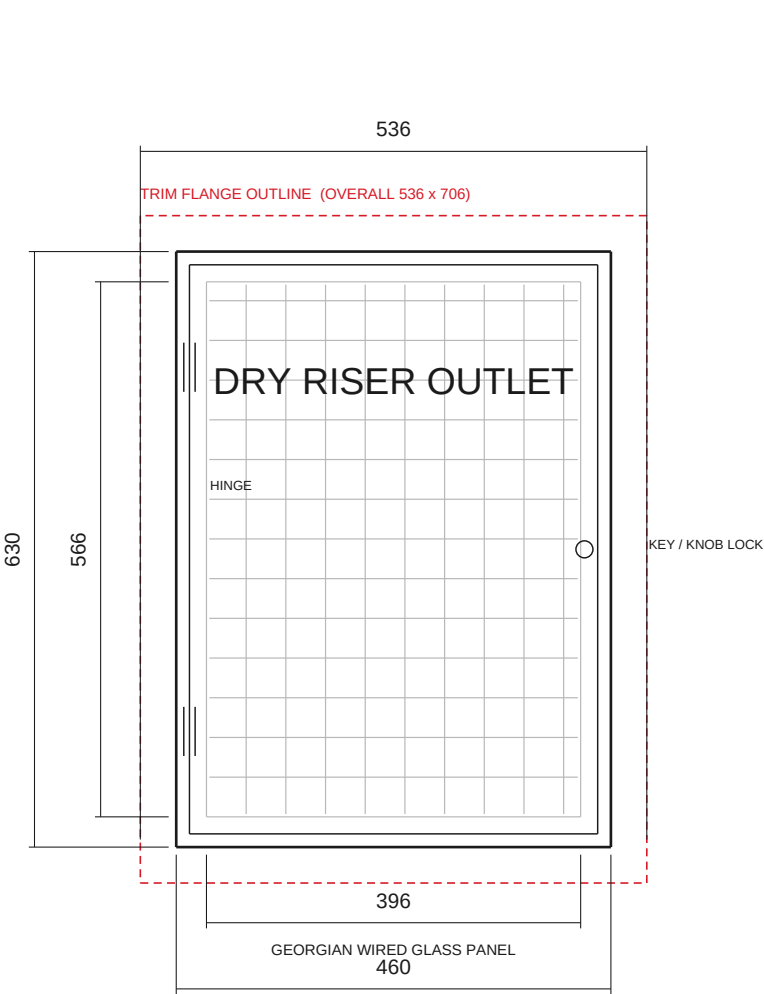

SIDE SECTION

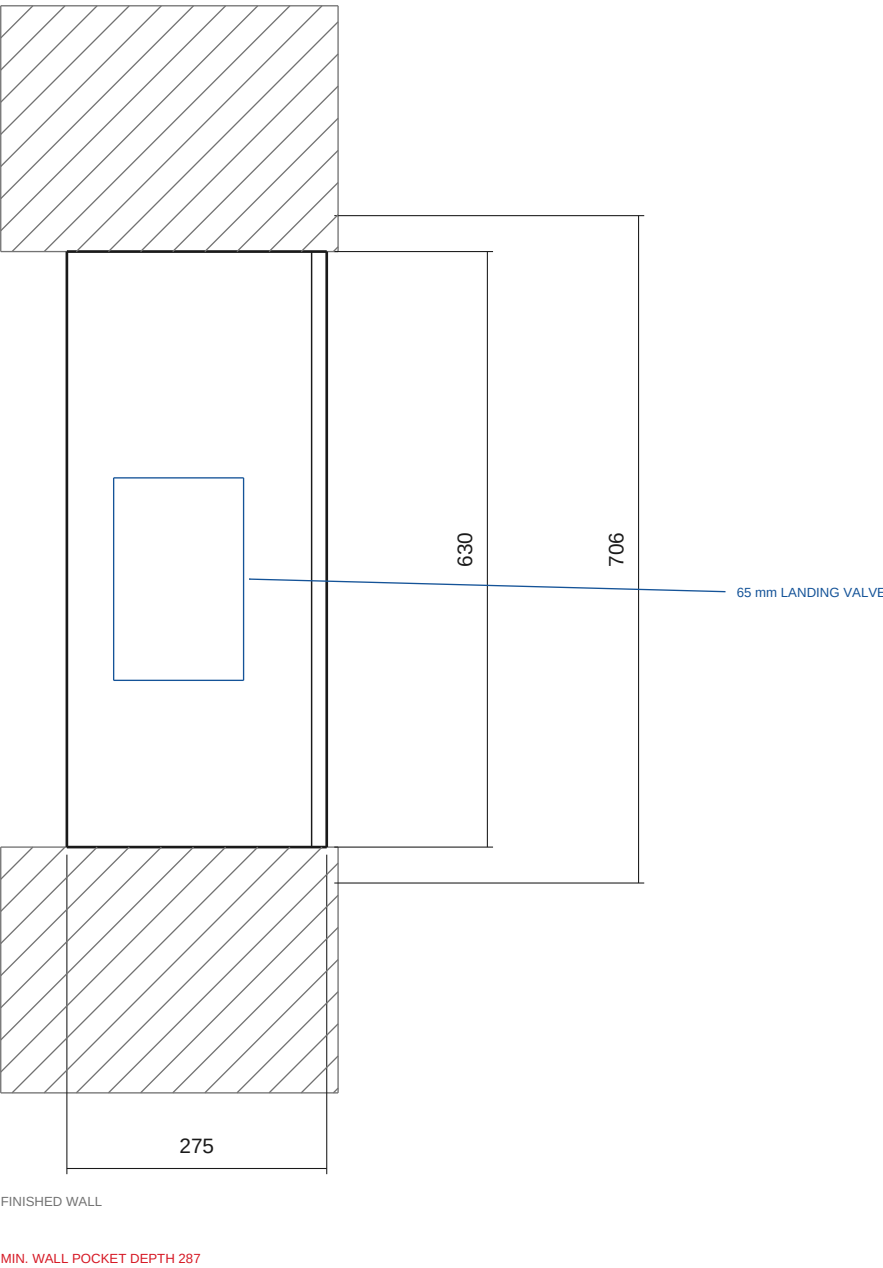

APPLICATION · SK-UK-O1

- NOMINAL TRADE SIZE**
460W x 630H x 275D
- METRIC (W x H x D)**
460 x 630 x 275 mm
- MOUNTING**
RECESSED, wall aperture 470 x 640 x 285
- CONTENTS**
One 65 mm landing valve on a dry or wet riser drop
- BODY**
Zintec or CRS 1.2-1.5 mm, powder coat RAL 3002
- DOOR**
6 mm Georgian wired glass panel in a steel door
- HARDWARE**
Slam lock keyed alike, concealed pivot hinges (piano hinge on request)
- MOUNTING HEIGHT**
Inlet 400-600 mm AFF typical; outlet to the landing valve on the riser drawing
- CODE BASIS**
Box dimensions to BS 5041 Part 5; installation to BS 9990
- REMARK**
Wet riser outlets often carry "PRV" lettering where the valve is pressure-reducing.

NOTES

- ALL DIMENSIONS IN MILLIMETRES, WRITTEN W x H x D. WALL APERTURE IS 10 mm LARGER ALL ROUND THAN THE CABINET BODY.
- BODY: ZINTEC OR COLD-ROLLED STEEL 1.2-1.5 mm (16 SWG ON FLOOR-MOUNTED). SUS 304 BRUSHED STAINLESS ALSO MADE.
- FINISH: POWDER COAT RAL 3002 CARMINIE RED - THE UK CONVENTION FOR FIRE MAINS. RAL 3000, WHITE OR BARE BRUSHED STAINLESS ON REQUEST.
- GLAZING: 6 mm GEORGIAN WIRED GLASS PANEL. CLEAR TOUGHENED GLASS, POLYCARBONATE OR A SOLID STEEL DOOR ALSO MADE.
- HARDWARE: SLAM LOCK KEYED ALIKE, CONCEALED PIVOT HINGES AS STANDARD. STAINLESS PIANO HINGE OR A PADLOCK HASP FOR A FIRE-BRIGADE PADLOCK ON REQUEST.
- LETTERING: "DRY RISER INLET" OR "DRY RISER OUTLET", WHITE ON RED. "WET RISER", "FIRE MAIN" OR "PRV" ON REQUEST.
- TOLERANCE ON OVERALL DIMENSIONS: +/- 2 mm. EXTERNAL INLET CABINETS HAVE A GASKETED DOOR AND DRIP LIP.
- CABINETS ARE MADE TO THE BS 5041 PART 5 BOX DIMENSIONS SO A STANDARD BREECHING DROPS STRAIGHT IN. INLET BREECHINGS AND LANDING VALVES ARE THIRD-PARTY BOUGHT-IN COMPONENTS. WE DO NOT HOLD LPCB OR KITEMARK CERTIFICATION AND DO NOT CLAIM IT.

SOKEI FIRE

Fire hose cabinet manufacturer · sokeifire.com

UK MARKET

STANDARD SIZE DRAWING PACK

TITLE
DRY RISER OUTLET CABINET - 460 x 630 x 275 (LANDING VALVE, RECESSED)

NOMINAL TRADE SIZE
460W x 630H x 275D

DRAWING No.
SK-UK-O1-REC


MOUNTING
RECESSED

UNITS
mm [inch]

SCALE
1 : 8

FRONT ELEVATION

SIDE SECTION

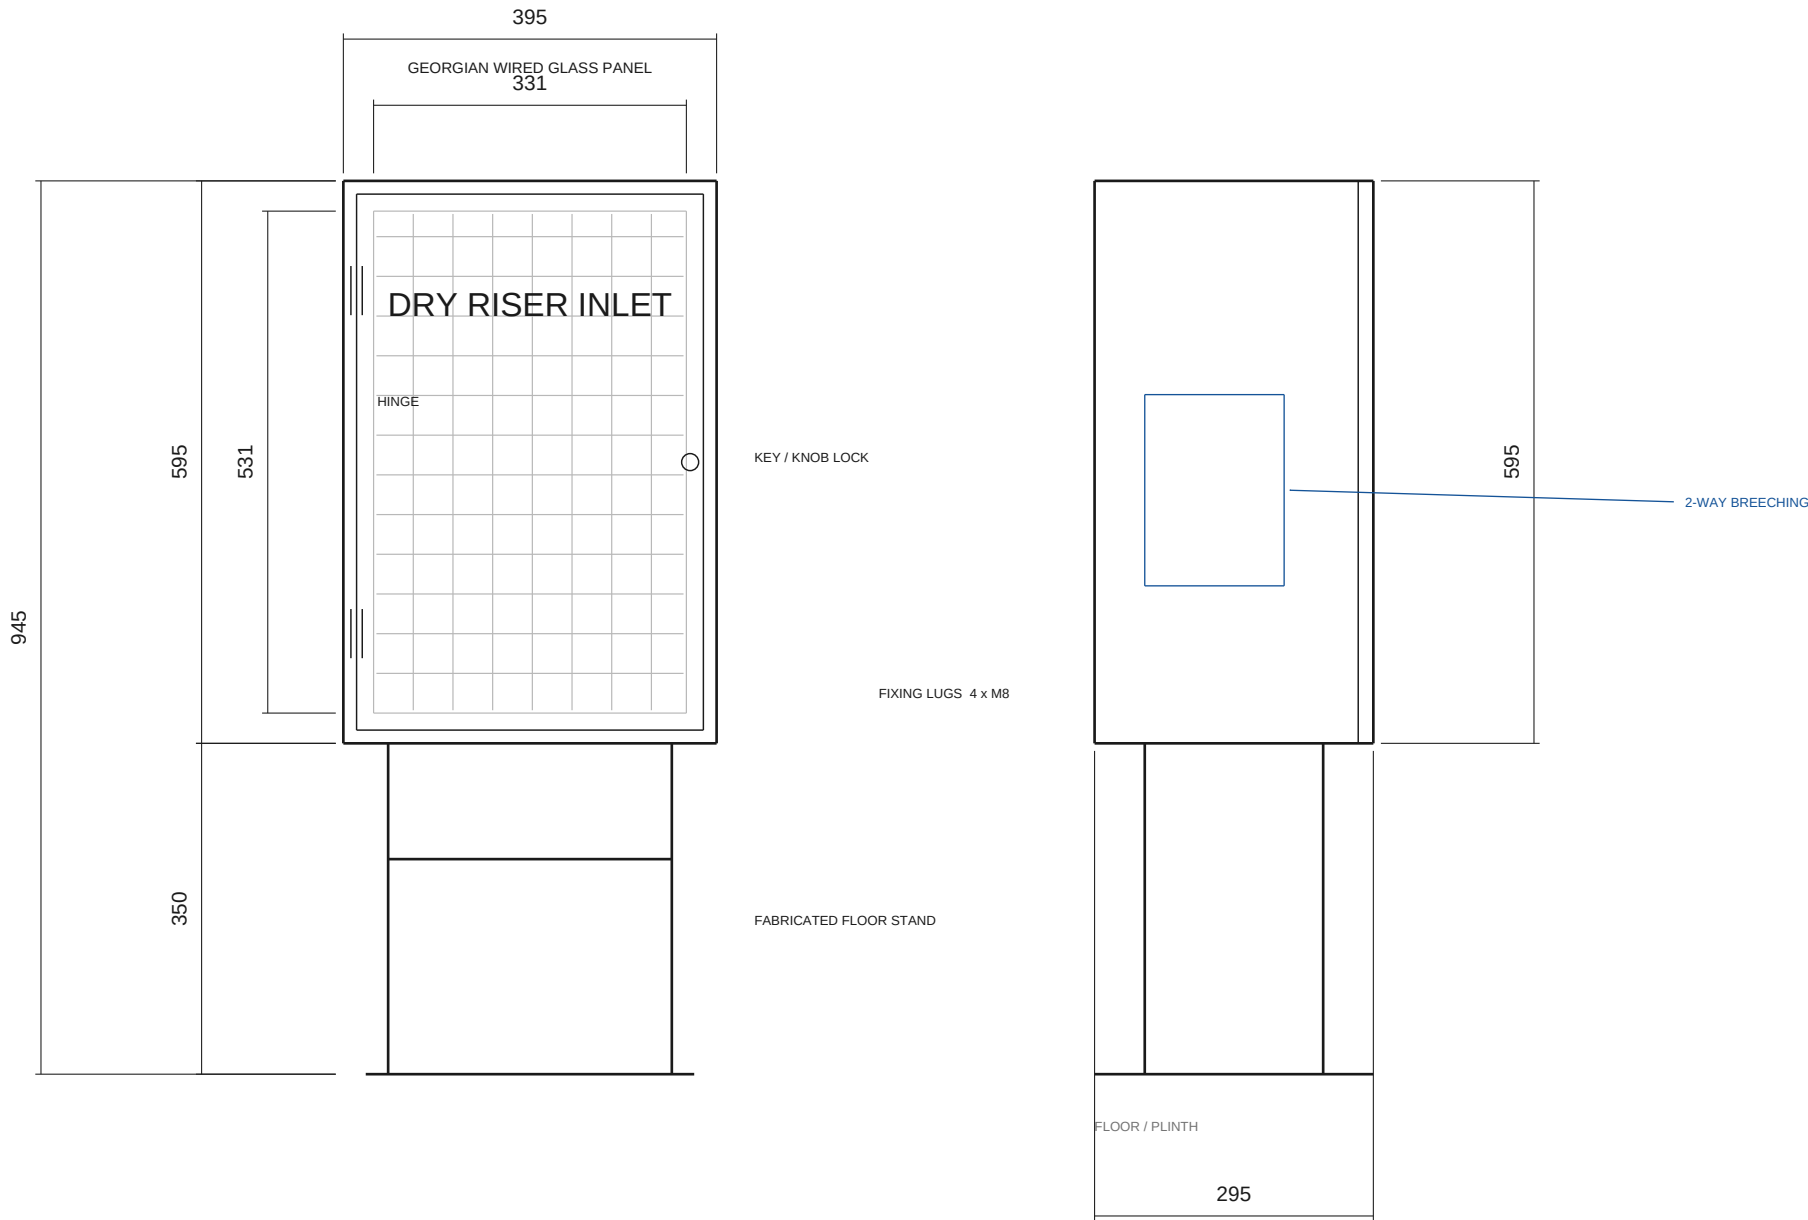

APPLICATION · SK-UK-FLR

NOMINAL TRADE SIZE

395W x 595H x 295D

METRIC (W x H x D)

395 x 595 x 295 mm on plinth

MOUNTING

FLOOR MOUNTED on a plinth

CONTENTS

2-way inlet breeching where there is no wall to recess into

BODY

16 SWG Zintec steel, RAL 3002

DOOR

6 mm Georgian wired glass panel in a steel door

HARDWARE

Slam lock keyed alike, concealed pivot hinges (piano hinge on request)

MOUNTING HEIGHT

Inlet 400-600 mm AFF typical; outlet to the landing valve on the riser drawing

CODE BASIS

Box dimensions to BS 5041 Part 5; installation to BS 9990

REMARK

UK floor-mounted type: 16 SWG Zintec body with a 5 mm chequer plate door, electro-plated silver.

NOTES

- ALL DIMENSIONS IN MILLIMETRES, WRITTEN W x H x D. WALL APERTURE IS 10 mm LARGER ALL ROUND THAN THE CABINET BODY.
- BODY: ZINTEC OR COLD-ROLLED STEEL 1.2-1.5 mm (16 SWG ON FLOOR-MOUNTED). SUS 304 BRUSHED STAINLESS ALSO MADE.
- FINISH: POWDER COAT RAL 3002 CARMINE RED - THE UK CONVENTION FOR FIRE MAINS. RAL 3000, WHITE OR BARE BRUSHED STAINLESS ON REQUEST.
- GLAZING: 6 mm GEORGIAN WIRED GLASS PANEL. CLEAR TOUGHENED GLASS, POLYCARBONATE OR A SOLID STEEL DOOR ALSO MADE.
- HARDWARE: SLAM LOCK KEYED ALIKE, CONCEALED PIVOT HINGES AS STANDARD. STAINLESS PIANO HINGE OR A PADLOCK HASP FOR A FIRE-BRIGADE PADLOCK ON REQUEST.
- LETTERING: "DRY RISER INLET" OR "DRY RISER OUTLET", WHITE ON RED. "WET RISER", "FIRE MAIN" OR "PRV" ON REQUEST.
- TOLERANCE ON OVERALL DIMENSIONS: +/- 2 mm. EXTERNAL INLET CABINETS HAVE A GASKETED DOOR AND DRIP LIP.
- CABINETS ARE MADE TO THE BS 5041 PART 5 BOX DIMENSIONS SO A STANDARD BREECHING DROPS STRAIGHT IN. INLET BREECHINGS AND LANDING VALVES ARE THIRD-PARTY BOUGHT-IN COMPONENTS. WE DO NOT HOLD LPCB OR KITEMARK CERTIFICATION AND DO NOT CLAIM IT.

SOKEI FIRE

Fire hose cabinet manufacturer · sokeifire.com

UK MARKET

STANDARD SIZE DRAWING PACK

TITLE

FLOOR MOUNTED DRY RISER INLET CABINET - 395 x 595 x 295

NOMINAL TRADE SIZE

395W x 595H x 295D

DRAWING No.

SK-UK-FLR-STD

MOUNTING

FLOOR MOUNTED


UNITS

mm [inch]


SCALE

1 : 8

FRONT ELEVATION

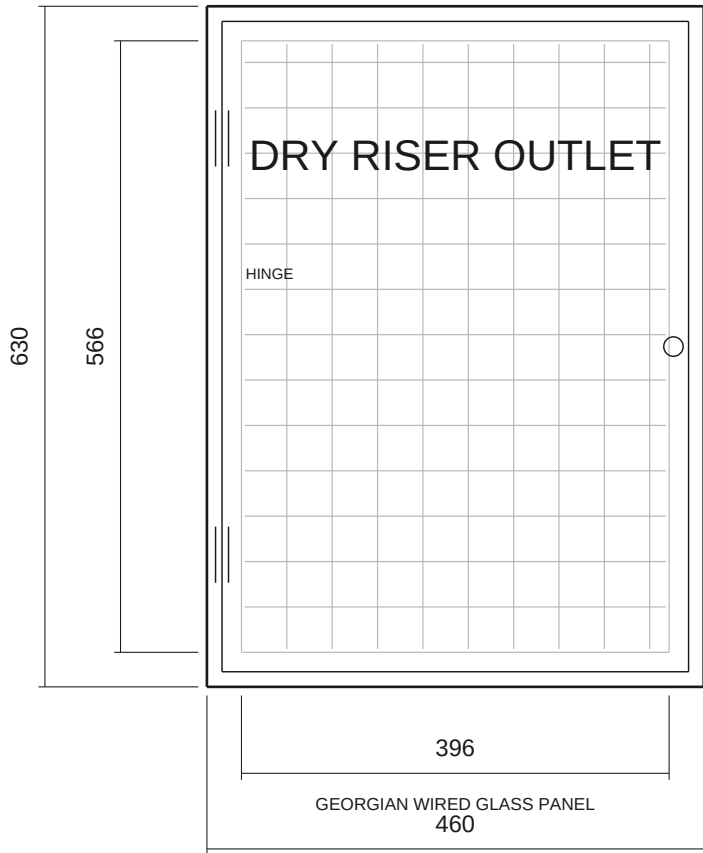

SIDE SECTION

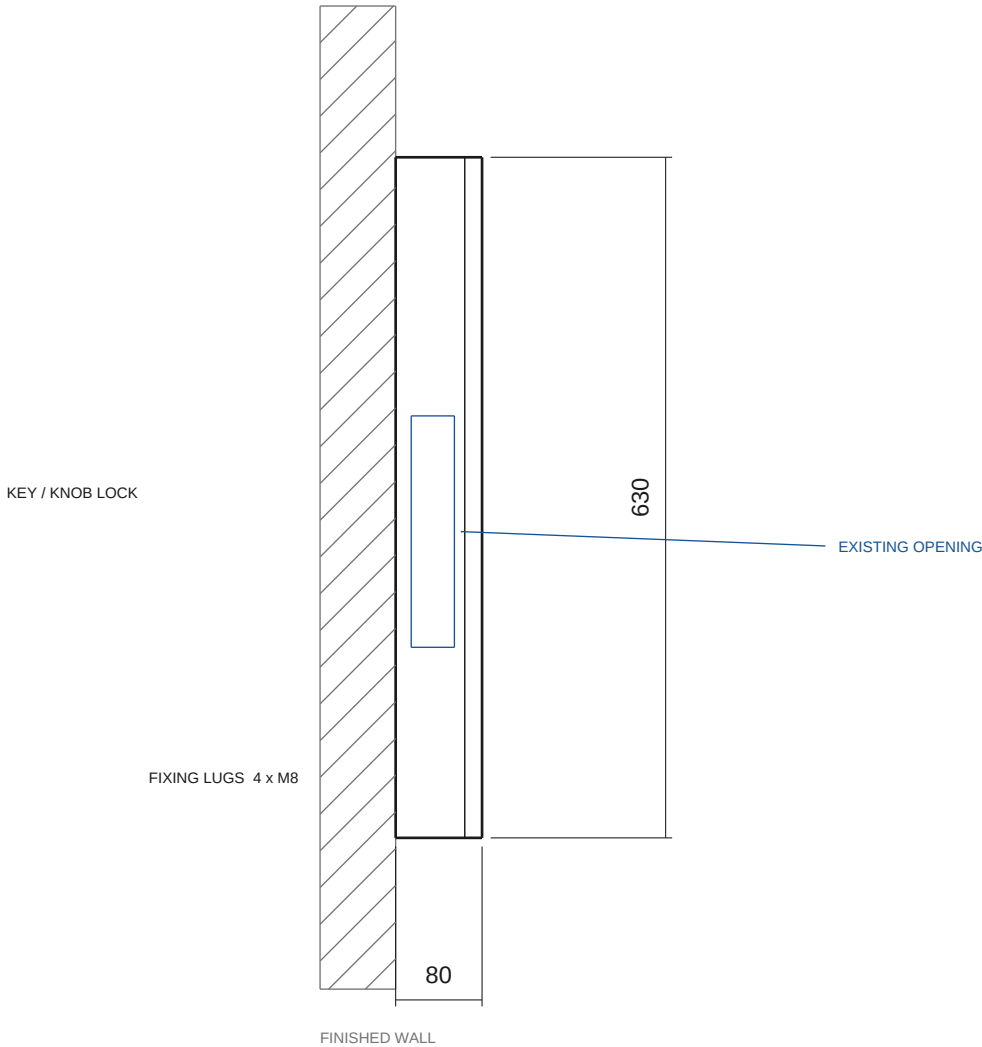

APPLICATION · SK-UK-ARCH-O

NOMINAL TRADE SIZE

460W x 630H x 80D

METRIC (W x H x D)

460 x 630 x 80 mm

MOUNTING

ARCHITRAVE AND DOOR over an existing opening

CONTENTS

Door and 38 mm surrounding frame only - no box; fits over an existing recess

BODY

Zintec or SUS 304, RAL 3002

DOOR

6 mm Georgian wired glass panel in a steel door

HARDWARE

Slam lock keyed alike, concealed pivot hinges (piano hinge on request)

MOUNTING HEIGHT

Inlet 400-600 mm AFF typical; outlet to the landing valve on the riser drawing

CODE BASIS

Box dimensions to BS 5041 Part 5; installation to BS 9990

REMARK

Used when the builder has already formed the recess. 38 mm frame all round.

NOTES

- ALL DIMENSIONS IN MILLIMETRES, WRITTEN W x H x D. WALL APERTURE IS 10 mm LARGER ALL ROUND THAN THE CABINET BODY.
- BODY: ZINTEC OR COLD-ROLLED STEEL 1.2-1.5 mm (16 SWG ON FLOOR-MOUNTED). SUS 304 BRUSHED STAINLESS ALSO MADE.
- FINISH: POWDER COAT RAL 3002 CARMINIE RED - THE UK CONVENTION FOR FIRE MAINS. RAL 3000, WHITE OR BARE BRUSHED STAINLESS ON REQUEST.
- GLAZING: 6 mm GEORGIAN WIRED GLASS PANEL. CLEAR TOUGHENED GLASS, POLYCARBONATE OR A SOLID STEEL DOOR ALSO MADE.
- HARDWARE: SLAM LOCK KEYED ALIKE, CONCEALED PIVOT HINGES AS STANDARD. STAINLESS PIANO HINGE OR A PADLOCK HASP FOR A FIRE-BRIGADE PADLOCK ON REQUEST.
- LETTERING: "DRY RISER INLET" OR "DRY RISER OUTLET", WHITE ON RED. "WET RISER", "FIRE MAIN" OR "PRV" ON REQUEST.
- TOLERANCE ON OVERALL DIMENSIONS: +/- 2 mm. EXTERNAL INLET CABINETS HAVE A GASKETED DOOR AND DRIP LIP.
- CABINETS ARE MADE TO THE BS 5041 PART 5 BOX DIMENSIONS SO A STANDARD BREECHING DROPS STRAIGHT IN. INLET BREECHINGS AND LANDING VALVES ARE THIRD-PARTY BOUGHT-IN COMPONENTS. WE DO NOT HOLD LPCB OR KITEMARK CERTIFICATION AND DO NOT CLAIM IT.

SOKEI FIRE

Fire hose cabinet manufacturer · sokeifire.com

UK MARKET

STANDARD SIZE DRAWING PACK

TITLE

DRY RISER OUTLET ARCHITRAVE & DOOR - 460 x 630 x 80

NOMINAL TRADE SIZE

460W x 630H x 80D

DRAWING No.

SK-UK-ARCH-O

MOUNTING

ARCHITRAVE

UNITS

mm [inch]

SCALE

1 : 7